




# Fluoride Removal Filter Cartridge

AWC supplies a USA made fluoride cartridge filter made from activated alumina. Activated alumina (AA) is the only filter material specifically designed to remove fluoride and arsenic from water. It is a ceramic compound made of aluminium oxide with a very high surface-"area-to-weight" ratio, giving it a very high capacity for fluoride adsorption. AA filters can reduce fluoride concentrations to below 0.1 ppm, in other words 97% of the normal fluoridated water level.

## Features & Benefits

- Up to 97% Fluoride removal
- Activated Alumina can be blended with other absorbents such as carbon, clay minerals, molecular bonding agents and elastomeric polymer.
- Mechanically strong and highly resistant to abrasion, breakage and deterioration during usage thereby insuring a long life service.
- Activated Alumina is relatively inert, non-toxic, non-corrosive and not prone to oxidation
- Good performance, even at low concentration ranges

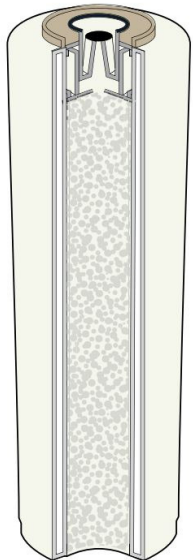

*Fits standard 10" Canisters*



*Activated Alumina*

## How does Activated Alumina work?

Activated alumina adsorbs, not absorbs & this is an important difference. For example, a sponge will absorb water, but the water molecules do not actually bond with those of the sponge. Therefore, the water can simply leak out or evaporate after a while. On the other hand, activated alumina adsorbs. When a chemical is drawn into the pores of an activated alumina sphere, it actually bonds with the solid material. Once in, it won't come out without considerable heating.

## Specifications

<b>Capacity</b>	12 months/2000 litres
<b>Flow Rate</b>	3 litres per minute
<b>Micron Rating</b>	1 micron nominal

Up to **97%** Fluoride Removal



# Activated Carbon Block Filter Cartridges

Activated carbon filters are particularly effective at removing pollutants which create unpleasant taste, colour, and odour in water. These fast-acting filters can eliminate or reduce the levels of chlorine by-products, pesticides, herbicides, and other organic and industrial chemicals.

There are two forms of carbon in general use: granular and block. A Granular Carbon filter contains Carbon granules of carbon about the size of coarse sand while carbon block consists of finely powdered carbon compressed into a solid mass. Typically carbon filters are 5 micron but can be different.

To get the best use from any carbon filter, it should be kept free of sediment and heavy organic impurities if these are present in your water. Typically an inexpensive sediment filter used as a "pre filter" would be installed prior to the carbon unit to extend the life of the more expensive carbon cartridge.

Be aware that there are many cheap carbon filters on the market that originate from Asian countries where the carbon has been sourced from coal rather than coconut which give off dangerous carcinogens.

AWC only uses quality carbon sourced from activated coconut shell that has been washed numerous times.

## Features & Benefits


- Quality assured carbon block cartridges
- No carbon fines and superior contaminant capacity.
- Enhanced dirt holding capacity for extended cartridge life.
- Reduces chlorine, bad taste and odour.
- Formed by thermal bond without use of any binders and adhesives
- Certificated by NSF42 and FDA CFR Title 21.



## Filtration Process



Structure of the Carbon Block Filter



Carbon Block Filter Absorption

Key Specs include a 5 µm micron rating & removal of Chlorine, organochemicals, unnatural tastes and odours found in TAP water.

The Carbon Filters are made of fine **COCONUT SHELL** carbon that offers a much finer filtration of suspended particles, chemicals, & dirt.

