



Polypropylene Sediment Cartridges




Sediment filters are used as a primary filter to help to remove dirt, rust and sediment deposits, from water to help prevent or slow down the blockage of the secondary carbon filter.

Sediment filters range from less than 1 micron to about 70 microns but the most typically used are 5, 10, 20, 25, 30, 50. They would typically be used in a sequence with the biggest "pore" size or micron size being the first one the water goes through and the smallest the last.

AWC recommends sediment filter made from Polypropylene which is resistant to the growth of bacteria. They typically come in four sizes which are 9", 10" and 20" tall and 2.5" and 4.5" radius. They are typically referred to as either Slim Line or Big Blue.

Features & Benefits

- Three-layers structure cartridge, high contaminant holding capacity, long filter service life.
- 100%PP for compatibility with a wide range of process fluids.
- Micro-Denier melt-blown fiber, high removal ratings.
- Formed by thermal bond without use of any binders and adhesives
- Certificated by NSF42 and FDA CFR Title 21.

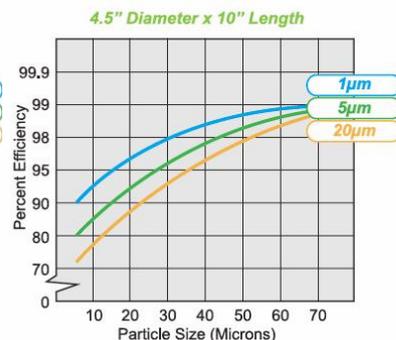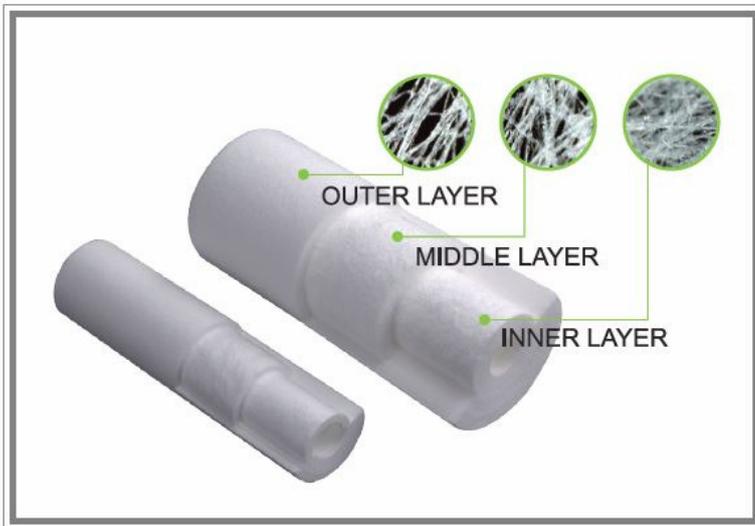

Model No.	FPP-LL-WX-ZZZ
Micron Rating	1,3,5,10,25,50,75,100 Micron
Material of Construction	100% melt-blown micron-denier PP fibre
Length	9", 10", 20", 30", 40" (251mm, 254mm, 508mm, 762mm, 1016mm)
Inner Diameter	28mm
Outer Diameter	2.5", 4.5" (63mm, 110mm)