



# Big Belly Auto Fill Floor Standing Dispenser

## Ideal for high volume needs

The Big Belly Auto Fill water dispensers are Australia's number one selling, mains connected, drain free units. Preferred by the filtration industry because of their build quality, reliability and their huge 12 litre filtered water reservoir, they provide a cost effective means of supplying endless Cold water without the hassle of storing and changing spring-water bottles.

### Features

- Plumbs directly to water source
- Complete American designed filter system
- Hot & Cold or Cold & Cool water temperature options
- Large 12 litre reservoir
- Easily cleaned and sanitised
- Easy to operate taps
- Hot water safety tap
- 3-year comprehensive warranty

### Performance

Tap 1 outlet water 9°C approx.

Tap 2 outlet water 18°C approx.

Hot tap outlet 88°C approx.

### Faucets

High impact polypropylene lever type. Fast flow and easy to operate. Hot tap safety tap.

### Colour

High gloss cloud white available as standard

### Cabinet

Top and front panels are moulded of UV treated ABS and side panels are zinc coated steel sheets covered in electrostatically applied high polymer polyester resin.

The rust-proof top provides a flat surface to hold small coffee servers and trays

### Cooling Reservoir

Constructed of polypropylene plastic, approximately 12 litres in capacity. The reservoir features large radius corners to facilitate cleaning. The integrated zoned waterway and baffle system prevents ice rings from restricting chilled water flow. Cold water capacity below the baffle is 4.2 litres. Water above the baffle stays at or about room temperature.

ROOM TEMP	150ML CUPS/HR AT 10°C	LITRES/HR AT 10°C
21°C	44	6.6
27°C	32	4.8
32°C	18	2.7



Choose Between  
Hot & Cold  
Cold & Cool

### Hot Tank

500 Watt sheathed heater installed in the tank ensures accurate temperature control. On/Off switch is easily accessible at rear of cabinet. Tank capacity is 2 litres.

Hot water delivery: 15 x 170ml cups p/hr

### Drip Tray

Concealed lift-out design of a high impact durable plastic. Removable for sanitation, it incorporates an anti-splash grid which diverts drain water into the drip tray.

### Dimensions

31 cm W x 31 cm D x 104 cm H

### Warranty

The entire range of AWC Big Belly Series water coolers are covered by our 3 Year Comprehensive Warranty. The warranty provides comprehensive parts and labor coverage, for the period of 3 year from the date of original sale.



# ELF In-Line Water Filter

## Quality Filters Producing Great Tasting Water

The ELF filter produced by Omnipure the Global filter company based in the USA sets a new benchmark for long-term quality filtration of water.

These Omnipure filters are available in a range starting with the standard 10 & 1-micron carbon blocks, lead specific carbon blocks & polyphosphate carbon blocks for equipment protection from contaminants associated with hard water. This is especially important with equipment that has a heating element such as dishwashers, steam ovens & even Ice machines & Coffee machines.

The filter bodies are constructed using virgin, high-impact polypropylene which is especially ideal for use in applications where sanitary conditions are required.

All materials used in the construction of the filters are NSF &/or FDA approved.

They are a very popular filter in all fields of domestic & retail applications due to their ease of being able to be removed & replaced with a minimum of fuss.



### BUYER BEWARE


Many inferior carbon filters coming from Asian countries & positioned very cheaply in the market place, give people the false perception that they have chosen a filter that is going to give them a healthy outcome.

Nothing could be further from reality because the source of carbon in the filters dictates the quality and consequently its healthiness and safety

Carbon sourced from coal gives off dangerous carcinogens and is used in cheap filters.

Omnipure filters only use quality carbon sourced from activated coconut shell which has been washed numerous times.

## ELF P RA 190mg PHOS/PBM

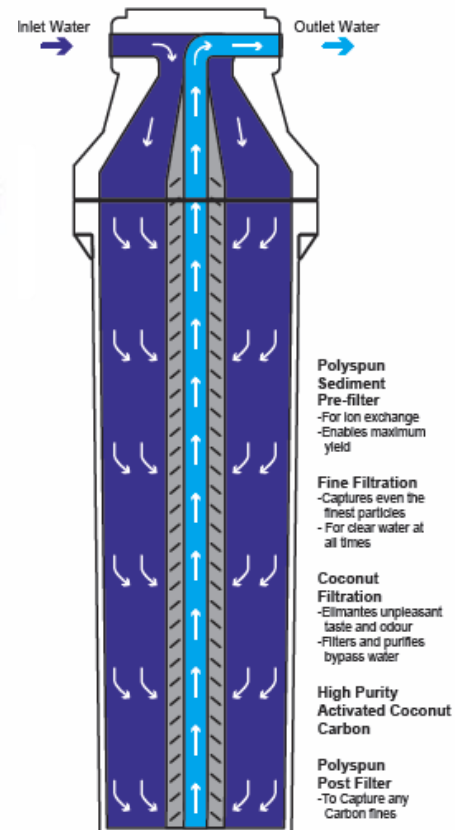

Configuration of a ELF filter cartridge with 5-way filtration

Made in USA



## Specifications

ELF Filter ELF-P-RA	
Micron Rating	>98% @ 10 _m
Filter Dimensions	3.125" O.D. x 2.875" I.D. x 12.7" L
Chlorine Reduction >95%	>10,000 gallons @ 1.5 GPM
Initial _P	<4.0 psid @ 1.5 GPM
Carbon Weight	0.75 lbs.
Carbon Type	Activated Coconut Shell Acid Washed

Scale Reduction - 6 months

Notes: Chlorine reduction capacity based on laboratory testing conducted using test protocol contained in NSF Standard 42. This filtration block is tested and Certified by NSF International under ANSI/NSF Standard 42 for materials only.



Great coolers. Quality filters. Exceptional service

## HOW TO CHANGE THE FILTER ON YOUR AUTO-FILL WATER DISPENSER

Please read these instructions carefully & in full before you start the process of changing your water filter.

Once familiar with the instructions follow them carefully step by step to ensure a smooth changeover of the filter.

1. Find the isolation tap that turns the water off leading to the filter. This is usually a white fitting with a BLUE handle.
2. Turn the handle of the fitting 90 degrees so that it now faces the opposite direction to the plastic hose that carries the water to the filter.
3. Please note on your new filter there is a notch on one side of the upper filter assembly and 2 notches on the other side of the upper filter assembly. When you remove the old filter from the filter head take note where the notches are for easy re-assembling.
4. Remove the old Filter by twisting to the right and pull the filter in a downwards direction. (sometimes they can be a bit tight)
5. Remove the BLUE dust cap from the top of your new filter
6. Insert your new filter taking note of where the notches are as previously mentioned. This will allow your filter to go back into the correct position. Sometimes a small amount of pressure/force is required.
7. Return the blue handle on the isolation tap to its original position.
8. Listen for the water filling the new filter.
9. Take a litre of water out of your water cooler from your taps to allow easy flush.

**If further assistance is required, please contact our office on 1300 365 202.**