

Hot Cold & Sparkling Undersink System

Designed for residential and commercial unlimited hot, chilled still and sparkling water on demand


Designed for the discerning user - A system that delivers hot, cold & filtered sparkling water delivered via stylish above sink faucets.

- Crisp Chilled Water
- Instant Piping Hot Water
- Effervescent Sparkling Water

Create unlimited hot, chilled or sparkling water in your home or office. Sparkling water is perfect on its own as a hydrating beverage. Add ice, crushed mint and a squeeze of lemon, or a handful of muddled berries, and you have a fancy drink. Sparkling water is also the perfect mixer, great for diluting anything too-sweet or too-strong, or adding to cordials and juices for a bit of a twist. Better yet, sparkling water has zero calories, which means no sugar, so is vastly better for you than soft drinks.



Hot

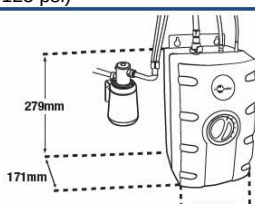Capacity	2.5 Litre Stainless Steel tank dispenses 100 cups of 98 °C water per hour
Electrical	220 -240 volts A.C. 1300 watts heating element with grounded three (3) pin plug
Thermostat	Electronic, adjustable from 88°C to 98°C (factory pre-set at 96°)
Hot Valve	Instant, self closing
Cold Valve	Manual return
Shipping Weight	5.5kg
Required Hole Diameter	35mm - 38mm
Required Supply Pressure	172 -862 KPa (1.7 - 8.6 bar) (25-125 psi)
Tank Dimensions	

Features & Benefits

- Unlimited hot, chilled & sparkling water
- Simple to use
- Chills 16L/hr
- Separate CO2 Canister stored externally
- Stainless Steel construction
- Adjustable temperature control
- External American made filter
- No complicated electronics

Filtration:

- Superior American made high volume filter
- High flow rate with minimal pressure drop
- High sediment holding capacity filter
- High chlorine removal rate via the finely powdered densely packed carbon

Cold & Sparkling System

Dimensions	42.5H x 24.5W x 40Dcm
Weight	Chiller 25kg gross
Delivers	Cold, Ambient Sparkling
Requirements	Power, Water, CO2
Cooling System	Silver Turbo Clean cooling system, provides improved hygiene and energy efficiency



Prices subject to change without notice



ELF In-Line Water Filter

Quality Filters Producing Great Tasting Water

The ELF filter produced by Omnipure the Global filter company based in the USA sets a new benchmark for long-term quality filtration of water.

These Omnipure filters are available in a range starting with the standard 10 & 1-micron carbon blocks, lead specific carbon blocks & polyphosphate carbon blocks for equipment protection from contaminants associated with hard water. This is especially important with equipment that has a heating element such as dishwashers, steam ovens & even Ice machines & Coffee machines.

The filter bodies are constructed using virgin, high-impact polypropylene which is especially ideal for use in applications where sanitary conditions are required.

All materials used in the construction of the filters are NSF &/or FDA approved.

They are a very popular filter in all fields of domestic & retail applications due to their ease of being able to be removed & replaced with a minimum of fuss.



BUYER BEWARE


Many inferior carbon filters coming from Asian countries & positioned very cheaply in the market place, give people the false perception that they have chosen a filter that is going to give them a healthy outcome.

Nothing could be further from reality because the source of carbon in the filters dictates the quality and consequently its healthiness and safety

Carbon sourced from coal gives off dangerous carcinogens and is used in cheap filters.

Omnipure filters only use quality carbon sourced from activated coconut shell which has been washed numerous times.

ELF P RA 190mg PHOS/PBM

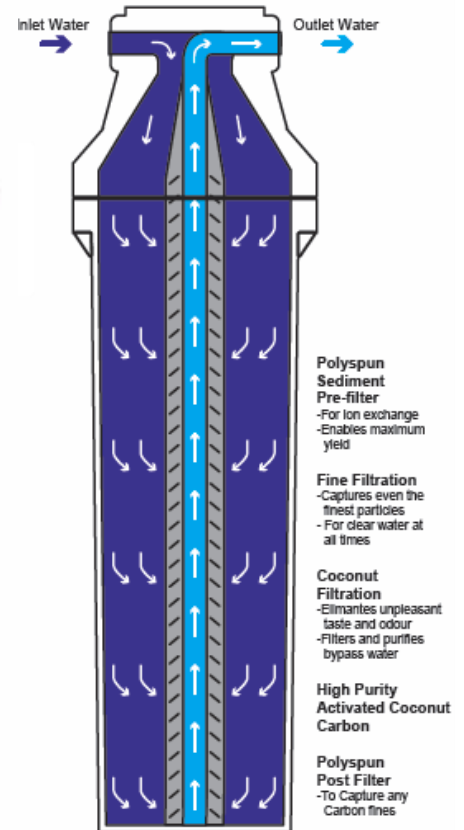

Configuration of a ELF filter cartridge with 5-way filtration

Made in USA



Specifications

ELF Filter ELF-P-RA	
Micron Rating	>98% @ 10 _m
Filter Dimensions	3.125" O.D. x 2.875" I.D. x 12.7" L
Chlorine Reduction >95%	>10,000 gallons @ 1.5 GPM
Initial _P	<4.0 psid @ 1.5 GPM
Carbon Weight	0.75 lbs.
Carbon Type	Activated Coconut Shell Acid Washed

Scale Reduction - 6 months

Notes: Chlorine reduction capacity based on laboratory testing conducted using test protocol contained in NSF Standard 42. This filtration block is tested and Certified by NSF International under ANSI/NSF Standard 42 for materials only.