


CERTIFICATIONS

5 YEARS WARRANTY

WaterMark
AS/NZS 3497:1998
No. 23448

BENEFITS

- ✓ Water feels softer.
- ✓ Softer skin and hair.
- ✓ Better tasting tea and coffee.
- ✓ Clean and clear shower glass.
- ✓ Less scrubbing.
- ✓ Reduce scale build up.
- ✓ Cleaner and softer laundry.
- ✓ Longer-lasting appliances.
- ✓ Better lather and soap action.



Reduces visible scale.

3-Stage Whole House Water Filtration System with Stainless Steel Cover ¹

Including Installation ^{2,3}

CLASSIC

PREMIUM

\$2995

\$3195



Removes hardness & limescale (Calcium Carbonate) 100% Guaranteed.

Water Softener with 2-Stage Pre-Filtration System

Including Installation ^{2,3,4}


CLASSIC

PREMIUM

\$4400

\$4600

The whole house filtration system is a "point of entry" system that purifies all water (Town, Bore, Dam, and Rain) before pipes divert into your home or business; the whole house system cleans your water from the source. This means you can enjoy filtered water from every tap in your home.

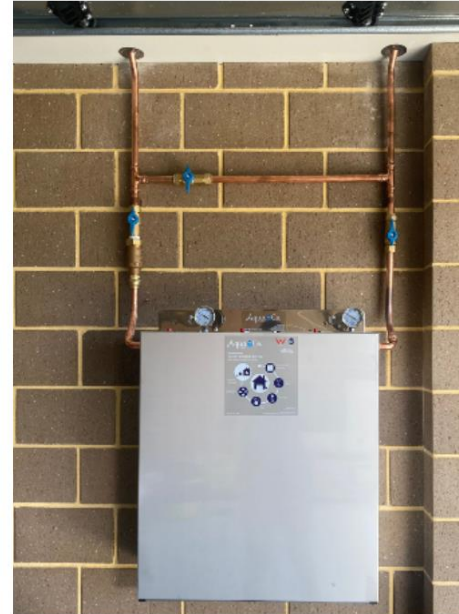

Preferred option for new builds and home renos!



For alkaline water and fluoride removal, add a Compact Reverse Osmosis for only \$595.

\$595

For customers looking for alkaline water (pH>9), a 99.99% fluoride and hardness removal as well as sweet tasting water (Bottled-like Water). The purchase, installation and maintenance of the system will be a fraction of a full-size reverse osmosis.

Consider having a 3 Way Mixer to avoid drilling a hole for a separate drinking faucet.



Alkaline Water

Certified Reduction Claim

- ✓ Fluoride
- ✓ PFAS
- ✓ Antibiotics
- ✓ Hardness
- ✓ Salt & Silica
- ✓ Nitrates & Nitrites

SPECIFICATIONS

Dimensions:
200 H x 300 W x 100 D mm
Connects To: Cold Water Line
Membrane Flow Rate: 16L/h
System Outflow Rate: 3 L/min
Min. Operating Pressure: 35 psi

MAINTENANCE RO

1st Stage: Carbon Filter (Every year)
2nd Stage: Membrane (Every 3 years)
3rd Stage: Alkalising Filter (Every 2 years)

Certified Reduction Claim

	CLASSIC	PREMIUM	CLASSIC	PREMIUM
Sediments	✓	✓	✓	✓
Chlorine	✓	✓	✓	✓
Pesticides & Herbicides	✓	✓	✓	✓
Volatile Organic Compounds	✓	✓	✓	✓
Taste, Odours & Colour	✓	✓	✓	✓
Heavy Metals (Copper, Iron, Lead...)	✗	✓	✗	✓
Parasites, Bacteria & Viruses	✗	✓	✗	✓
Chloramines	✗	✓	✗	✓
Visible Calcium Scale	✗	60%	✗	100%

Dimensions System: 600 W x 740 H x 220 D mm Softener: 470 W x 1100 H x 340 D mm

Replacement Filters Bundle

\$270

\$399

\$165

\$299

Filters last up to 18 months. Replacement frequency also depends on water quality and usage.

Notes

- ¹ \$200 OFF if stainless steel cover is not required (Indoor installations).
- ² Installation is available in Perth, Sydney, Brisbane and Gold Coast.
- ³ Terms and conditions apply for installation included in price (Special location requests can incur extra charges).
- ⁴ Power Point for water softener is not included.

SPECIFICATIONS

Flow Rate: 50-60 LPM
Connection Type: 1" or 3/4" Ports
Operating Pressure: 80 psi (620 kPa)
Operating Temperature: 2°C - 52°C (protect from freezing)
Filter Life: Up to 300,000 litres in city/town water

1st Stage



ALGAE



DIRT & SAND



RUST, SILT, MUD & CLAY



Sediment Filter

100% Polypropylene Triple Gradient Sediment Filter for the most efficient reduction of dust, dirt, rust, algae and sand.

- Removes particles down to 5 microns.
- Made with materials complying with NSF/ANSI Standard 42.

2nd Stage



VOCs



CHLORINE, TASTE & ODOURS



HERBICIDES & PESTICIDES



Carbon Block

Carbon Filters for the most effective reduction of chlorine, volatile organic compounds, pesticides, herbicides, taste, colour and odour from water.

- Made with compliant raw materials using cutting-edge methods resulting in premium performance, reliability, adsorption and flow rates.
- Made with materials complying with NSF/ANSI Standard 42.

3rd Stage: Premium



CHLORAMINES



CHEMICALS



BACTERIA & VIRUSES



PARASITES



HEAVY METALS

Aragon features the latest technology in water filtration. The media combines mechanical, ion exchange, adsorption, and electric adsorption filtration methods. Each filtration method removes different contaminants to deliver high quality drinking water.

- Particles >2 microns.....99.999%
- Lead, Arsenic.....99.95%
- Copper, Selenium.....97.6%
- Barium.....99.99%
- Beryllium.....95%
- Chromium, Mercury.....99%
- Thallium.....98%
- Zinc.....100%
- Cesium.....98%
- Chlorine.....100%
- Chloramines.....>90% +
- Pesticides.....97%
- Iron.....90%
- Antimony.....90%
- Aluminium.....97%
- Turbidity.....99%
- Oil Products.....90%
- Legionella.....99.99987%
- Salmonella Typhimurium.....99.9998%
- Poliovirus.....99.84%
- Rotavirus.....99.99%
- Hepatitis A virus.....96%
- Bacteria E.coli.....100%
- Pseudomonas aeruginosa.....100%
- Colifag f-2.....100%
- Eterobacter cloaceae.....100%



Aragon Guard



High Capacity • High Porosity • High Performance

- CERTIFICATIONS**
- Certified by Institut Pasteur de Lille (France)
 - Certified by S.M Kirov Military Medical Academy (Russia)
 - Certified by The Research Institute of Influenza (Russia)
 - Certified by V.G Khlopin Radium Institute (Russia)
 - Certified by The Research Institute of Epidemiology and Microbiology (Russia)
 - Certified by IFTS (France)
 - Certified by IAPMO (United States)
 - Certified by University of Ferrara (Italy)
 - Tested in Vienna University (Austria)
 - Tested in National Institute of Mineral Raw Materials of Russian Academy of Sciences (Russia)



Made in Europe

200% CAPACITY FILTERS

20"



10"



20" x 4.5" filters offer 200% capacity when compared to 10" x 4.5" filters

Please note our new whole house systems are 20" in height, giving you as twice as much contact time, flow rates, longevity and chemical removal rates, compared to old technologies and components used in older 10" systems.

New systems also come with a durable Stainless Steel Enclosure (not plastic), that will not bend over time, to protect housings from extreme conditions and UV rays. They also come with Stainless Steel Components rather than plastic for maximum durability.

3rd Stage: Classic



VOCs



CHLORINE, TASTE & ODOURS



HERBICIDES & PESTICIDES




Silver Carbon

Silver Impregnated Carbon Filter for the most effective reduction of chlorine, taste, odour, volatile organic compounds, herbicides, pesticides.

- This filter is bacteriostatic. This means that it will prevent the reproduction and growth of bacteria within the filter.
- Made with materials complying with NSF/ANSI Standard 42.

Big Carbon filters employ a high-grade carbon with industry-leading surface area, allowing for the most exceptional efficiency of the carbon absorption. The higher surface area extends the life of the cartridge, maximizing the time between cartridge changes.

Carbon Filters are also Tested and Certified by NSF International under NSF/ANSI Standard 42 for material requirements only.

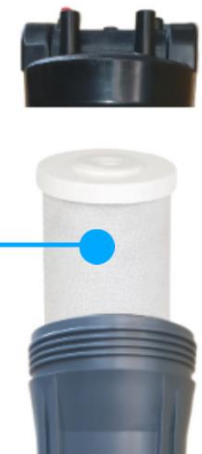

Automatic Water Softener With Pre-Filtration System



SPECIFICATIONS

Water Softener Dimensions:
470 W x 1100 H x 340 D mm
Pre-Filtration Dimensions:
600 W x 740 H x 220 D mm
Operating Flow Rate:
50 LPM
Connection Type:
1" or 3/4" Ports
Operating Pressure:
8.6 Bar
Operating Temperature
2°C - 60°C

The stainless steel enclosure in the pre-filtration system is corrosion resistant and protects the system from UV rays, sun damage and extreme conditions. Reflects sunlight whilst keeping low temperature in summer.

1st Stage



NSF Certified Triple Gradient Sediment Filter

For removal of dirt, sand, rust, dust, silt and algae.

Significantly prolongs the life in the post-filter.

2nd Stage



NSF Certified Coconut Shell Carbon Filter

Bacteriostatic filter that inhibits the reproduction of bacteria within the filter and reduces chlorine, taste, odours, pesticides, herbicides, VOCs and other chemicals.



Double Layered Aragon Filter (Aragon Polymers on the outside and coconut shell carbon in the core)

Combines assisted crystallization, coconut shell carbon, disinfection and bacteriostatic properties for significant reduction of chemicals, heavy metals, viruses, bacteria, parasites, radioactives, and other human pathogens.



Information Guide

1. Thank you and congratulations on your Automatic Water Softener purchase. Please read these instructions carefully prior to installation.

2. For right operation of this water filter system, it is vital to observe the manufacturer's instruction. This system has to be mounted in vertical position and must be positioned to allow access for annual filter cartridges replacement and services.

3. After completing the installation, the installer should inspect for leaks and correct if necessary.

WARNING:

DO NOT USE THE THREAD SEALANTS:

Thread tape only is permitted. If thread sealants are used all warranty is void.

Pressure Gauge or Plug Installation:

When installing pressure gauges, hand tight (no tape, no sealant).

Note:

- This product must be installed by a licensed plumber, unauthorised installation on this unit will void warranty.
- Filter housing must be protected against freezing.
- Must be operated under recommended pressure.
- Do not install filter housings to direct sunlight without our cover.

What's included?

- 2 Stage Pre-Filtration system
- 1 x 20" x 4.5" NSF Certified Triple Gradient Sediment Filter
- 1 x 20" x 4.5" NSF Certified Carbon Filter for Classic Filtration OR 1 x 20" x 4.5" Aragon for Premium Filtration
- 1 x Stainless Steel Frame
- 1 x Stainless Steel Cover*
- 1 x Stainless Steel Bracket
- 1 x Stainless Steel Glass/Pressure Gauges
- 1 x Tool Opening - Spanner
- Pressure Relief Buttons
- 2 x Brass reinforced ports for maximum durability
- 17,000 Litres Capacity Water Softener

Optional:

- Compact Reverse Osmosis System (Fluoride Reduction)
- Stainless Steel Cover (For outdoor installations)

System Qualities:

- ✓ Stainless steel cover for UV protection and extend system life
- ✓ Heavy-duty brass reinforced connections for high water pressure
- ✓ Stainless steel pressure gauges for easy monitoring
- ✓ Twist off housings for quick filter changes
- ✓ 20" filters for higher capacity compared to 10" filters

Automatic Water Softener SEV17



Product Description: Water softeners are typically used for removing calcium carbonate, manganese, iron and hardness from water sources and are regenerated by brine solutions. The treated water is soft and non scaling/staining. Commercial systems are available in single or twin (duplex) models and domestic units are available in cabinet style models.

SPECIFICATIONS

Type	Automatic Water Softener	
Description	One piece roto moulded plastic cabinet with lid, containing salt and brine storage all in the unit	
Capacity	17,000 litres at 100 mg/l hardness	
Resin Capacity	28 litres of high grade softening resin	
Control Valve	Fleck 5000 microprocessor 5 stage with regeneration All functions fully adjustable Valve controls brine refill	
Pressure Vessel	Thermowound fibreglass with blow moulded seamless liner	
Flow Rate	Continuous	35 litres per minute
	Peak	40 litres per minute
Pressure	Maximum	600 kpa (85psi)
	Minimum	175 kpa (25psi)
Pipe Sizes	Inlet/outlet	3/4" (20mm)
	Drain	1/2" (15mm)
Salt Storage	50kg capacity	
Salt Usage	4.5kg per regeneration	
Dimensions	1100mm (h) x 470mm (w) x 340mm (d)	
Weight	47kg (dry)	
Voltage	240 volts operation	

Note: Product specifications are a guide only and can change without notice.

WHERE TO INSTALL

Water softeners are designed to treat the water supply to the entire home and therefore need to be connected to the main water supply to the property. It is advisable to segregate garden taps if possible. During regeneration a pre-determined capacity of saline water will be discharged to drain necessitating connection to a sewer/ deep drain rather than to a storm water drain. Automatic models require a 240V general power outlet to operate – semi automatic models do not. Automatic models are supplied with all parameters pre-set apart from the time of day. The time of day can be set by pushing the "arrow up" or "arrow down" buttons until the correct time is displayed. No adjustments are required for semi-automatic models.

Salt Usage ► 4.5kg per regeneration. Every regeneration occurs every 8,500 litres at 200mg/l of hardness (2-3 months).

5 YEARS WARRANTY



Automatic Water Softener FAQ's



Salt Compartment

Salt Usage ► 4.5kg per regeneration. Every regeneration occurs every 17,000 litres at 100mg/l of hardness (3-4 weeks depending on water usage).

What type of salt is required?

Water Softener Salt



Why does the water softener require a pre-filter?

Installing a pre-filter prior to the water softener will prevent chlorine from entering the water softener.

Whilst the softening resin can tolerate some chlorine, the lifespan of the resin will be significantly prolonged if a carbon pre-filter installed prior to the softener.

Depending on the initial water quality being supplied to the softener it may be diligent to install a sediment and carbon pre-filter.

Pre-Filters should be replaced every year to protect the life span of the resin. However, this depends on water quality and water usage.

Why do softeners use salt?

Salt is used purely as a regenerate to wash accumulated hard-water salts to drain and to recharge the softening resin. The softening process relies on resin releasing sodium to make the water soft.

When salt (sodium chloride) is passed through the softening resin, the sodium is used to re-charge the resin and the chloride combines with accumulated hard-watersalts. They are reconstituted as insoluble salts that can then be washed to drain as part of the regeneration cycle.

The brine solution created by the salt is used only during the regeneration cycle. The brine water is rinsed from the resin bed with fresh water during the last stage of the regeneration cycle before the water softener is returned to service.

Once a supersaturated brine solution has been formed, the salt automatically stops dissolving. The level of water in the brine tank (softener cabinet) is preset and this determines the amount of brine that will be formed. In summary, the brining process happens automatically – all you need to do is to add salt.

When will I need to replenish the salt in the brine tank?

As a general rule it is diligent to keep the brine tank at least a third full at all times. If a brined tank is empty this could mean that the water softener has not been regenerating properly therefore will not work as required.

NOTE: Before adding a new bag of salt, it is a good idea to stir up the existing salt to prevent it from compacting. The rounded end of a broom handle is ideal for this.

When does a softener need to be regenerated?

The softener capacity is dependent on a combination of the amount of water being treated and the hardness of water being softened. Automatic water softeners regenerate once the pre-set capacity is reached.

How long should the softener regenerate for?

For optimum results it is important not to reduce regeneration times below that are recommended for your water softener. Doing so may have a detrimental impact on the softening resin or and/or allow salty water through to service.

The recommended time for regeneration is 90 minutes.

PRE-FILTRATION SYSTEM SERVICE GUIDE

AquaCo thanks you for purchasing the pre-filtration system for the water softener. The filter cartridges need to be replaced regularly to maintain optimum performance. This is a simple procedure when following instructions.

To order cartridge replacements or service, please contact our sales team at (08) 6156 0220

Annual replacement approximate cost
Standard: Sediment and Silver Carbon \$180*
Premium: Sediment and Aragon \$299*

1st Stage	2nd Stage	
	CLASSIC	PREMIUM
SEDIMENT	SILVER CARBON	ARAGON
20" x 4.5" (PP-2045-5-WAWF)	20" x 4.5" (SCB-2045-5-WAWF)	20" x 4.5" (ARA-2045-WAWF):
Every 12-18 Months (Dependant on water quality)	Every 12-18 Months	Every 12-18 Months

Every 18 months all filter cartridges should be replaced. However, replacement frequency also depends on water quality and usage.

To do any service in your Pre-Filtration System, close the valve 1 and 2.

To allow unfiltered water going into the property while servicing the system, close valve 1 and open valve 2.



Valves 1 and 3 remain open. Valve 2 remain close.

PROCEDURE

1. Close the bypass: Close the valves going in and out of the filter system (1 and 3) and open the valve #2 to allow unfiltered water going into the property. Otherwise, you can leave the valve #2 closed (Figure 1).

2. Softly press one of the red buttons on top of the bracket to release the pressure.

3. Open the housings: Slide the spanner underneath the first housing and twist the housing counterclock wise. Once is unlocked, unscrew the housing using both hands (Figure 2).

Note: Be careful as the housing will be full of water and quite heavy.

4. Remove the housing, take the old filter cartridge out and empty the housing.

5. Remove the plastic/packaging from the new filter cartridge and drop the new filter cartridge in the housing.

6. Screw in the filter housing using both hands and tighten it with the spanner.

7. Repeat the same process with the other filters housings.

8. Once you have replaced all filter cartridges, leave system valves as they were in the initial position:

- Valve 1 Open
- Valve 2 Close
- Valve 3 Open




Figure 3. Valve close and open direction

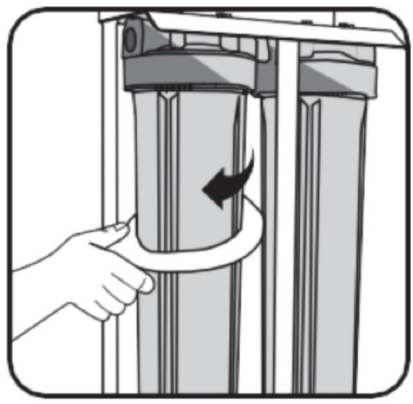


Figure 2. Unscrew the housing counterclock wise

Twin Premium Whole House Water Filtration System


Stainless Steel/Glass Pressure Gauges

- ✓ Sun resistant.
- ✓ Corrosion resistant.
- ✓ Monitor incoming and outgoing water pressure
- ✓ Stainless Steel oil filled pressure gauges for maximum precision and durability.

Stainless Steel Cover

- ✓ Highly anticorrosive and durable.
- ✓ Designed to protect equipment in extreme conditions keeping filters and housings cool.
- ✓ The cover will not discolour and go brittle like plastic covers do.

Note: Plastic covers will get hotter under the sun and will go brittle and crack over time due to UV rays.

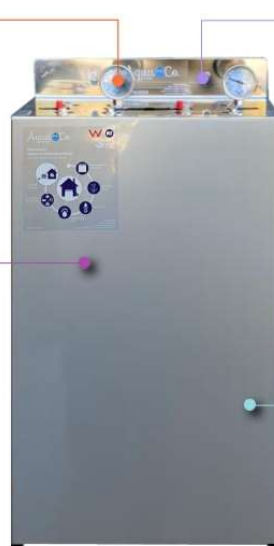

Stainless Steel Bracket

- ✓ Corrosion resistant.
- ✓ Designed to protect equipment in extreme conditions. Unlike powder coated brackets which rust and bend over time.

Note: Make sure exterior components are DURABLE and SUN-RESISTANT.



Stainless Steel is well known for its LOW HEAT conductivity & transmission.

Brass Reinforced Ports

- ✓ Dezincified and lead-free brass-reinforced heads prevent leaks, cracks and material fatigue after years of use under pressure.

ABS Caps

- ✓ Maximum strength and durability.
- ✓ Our super-seal mechanism protects the washers from being damaged when tightening the housings preventing water bypass.



Stainless Steel Stand and Frame

- ✓ Corrosion resistant.
- ✓ Designed to protect equipment in extreme conditions.
- ✓ Powder coated brackets rust over time.
- ✓ A full Stainless-Steel Frame gives rigidity to the system, protecting the heads and pipework from stress when replacing the filters.

20" x 4.5" Filters

- ✓ 100% more capacity compared to 10" x 4.5" housings.
- ✓ Filters last up to 18 months compared to 6 to 9 months for 10" and 15".



Sediment Filter

- ✓ Triple gradient sediment filter.
- ✓ 100% polypropylene.
- ✓ Removes sediments, dust, dirt, rust, sand, silt, and algae.

Aragon Filter

- ✓ Aragon polymers in the outer layer and coconut shell carbon core.
- ✓ Combines mechanical, electrical, ion exchange and adsorption filtration methods.
- ✓ Removes chlorine, taste, odour, volatile organic compounds, pesticides, herbicides, chloramines, heavy metals, viruses, bacteria, and parasites from water.



Reduction Claim

- ✓ Particles >2 microns.....99.999%
- ✓ Lead.....99.95%
- ✓ Iron.....90%+
- ✓ Copper.....99.99%
- ✓ Cadmium.....100%
- ✓ Manganese.....98.99%
- ✓ Zinc, Cesium.....98%
- ✓ Chlorine.....100%
- ✓ Chloramines.....>90%+
- ✓ Pesticides.....97%
- ✓ Aluminium.....97%
- ✓ Turbidity.....99%
- ✓ Oil Products.....90%
- ✓ Legionella.....99.99987%
- ✓ Salmonella Typhimurium.....99.998%
- ✓ Poliovirus.....99.84%
- ✓ Rotavirus.....99.99%
- ✓ Hepatitis A virus.....96%
- ✓ Bacteria E.coli.....100%
- ✓ Pseudomonas aeruginosa.....100%
- ✓ Colifag f-2.....100%
- ✓ Eterobacter cloacea.....100%
- ✓ Coronavirus.....100%
- ✓ Strontium.....99%
- ✓ Uranium.....99%
- ✓ Radium.....99%

AquaCo SEV 17 Water Softener


⚠ Unlike Salt-Free 'Softeners' or Water Conditioners, which cannot be reliably tested for calcium removal and often lack consistent performance, Automatic Water Softeners can be systematically assessed to validate their claims of calcium removal and softening capacity.

NSF Certified

- ✓ Certified to NSF/ANSI 44 and WQA S-100
- ✓ Laboratory tested to prove structural integrity and performance claims.
- ✓ Tested for softening capacity and rinse effectiveness.
- ✓ **Calcium removal claims backed with test results!**

Brine Tank

- ✓ Salt Compartment.
- ✓ Used to regenerate and rinse the resin with a brine solution.

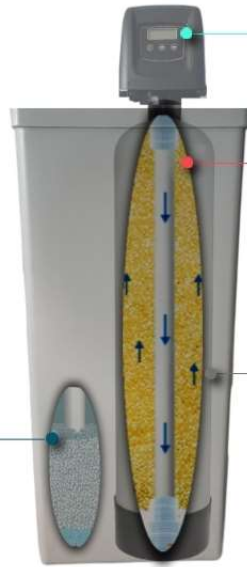

Integrated Flow Meter

- ✓ Counts how many litres have gone through the system to operate at peak efficiency without manual intervention.

High-Capacity Resin Cylinder

- ✓ 28 Litres of High-Grade Softening Resin.
- ✓ Removes hardness (calcium carbonate and magnesium), copper and iron.
- ✓ The treated water is soft, non-scaling/staining.

Fiber-reinforced Body

- ✓ The pressure vessel features a valve body constructed from fiber-reinforced polymer.
- ✓ Exceptional strength and durability. It's not only resistant to corrosion but also safeguards against UV degradation.



Automatic Regenerations

- ✓ It automatically regenerates after filtering 17,000 Litres at a hardness level of 100mg/l. Unlike cartridges filled with softening resin which only last 910 litres at the same hardness level and can't regenerate. When the resin in our system becomes saturated, the computer initiates a process called REGENERATION, wherein the resin is cleansed with a saline solution.
- ✓ As this regeneration process concludes, the system performs a final flush with fresh water, eliminating any residual salt, guaranteeing that the water that comes out of the water softener is not salty.

Water Softener Pre-Filtration

- ✓ The presence of chlorine, chloramines, and other oxidizing agents in the water can damage or degrade the resin beads inside the softener over time, reducing the effectiveness and lifespan of the water softener. The Whole House Water Filter is installed before the water softener to remove these oxidizing agents, protecting the resin beads and prolonging the lifespan of the water softener.

Bypass Valve

- ✓ Allows for easy maintenance and the ability to bypass the softener if needed without shutting off the main water supply.



Safety Features

- ✓ Includes overflow prevention, leak detection, and other safety measures to protect both the unit and the home.

Efficient Power Usage

- ✓ Automatic regeneration ensures the softener only operates when necessary, saving on water, energy and salt consumption.





Polypropylene Sediment Cartridges




Sediment filters are used as a primary filter to help to remove dirt, rust and sediment deposits, from water to help prevent or slow down the blockage of the secondary carbon filter.

Sediment filters range from less than 1 micron to about 70 microns but the most typically used are 5, 10, 20, 25, 30, 50. They would typically be used in a sequence with the biggest "pore" size or micron size being the first one the water goes through and the smallest the last.

AWC recommends sediment filter made from Polypropylene which is resistant to the growth of bacteria. They typically come in four sizes which are 9", 10" and 20" tall and 2.5" and 4.5" radius. They are typically referred to as either Slim Line or Big Blue.

Features & Benefits

- Three-layers structure cartridge, high contaminant holding capacity, long filter service life.
- 100%PP for compatibility with a wide range of process fluids.
- Micro-Denier melt-blown fiber, high removal ratings.
- Formed by thermal bond without use of any binders and adhesives
- Certificated by NSF42 and FDA CFR Title 21.

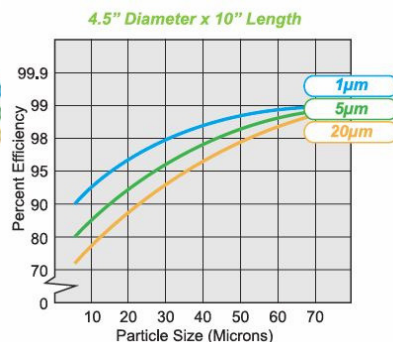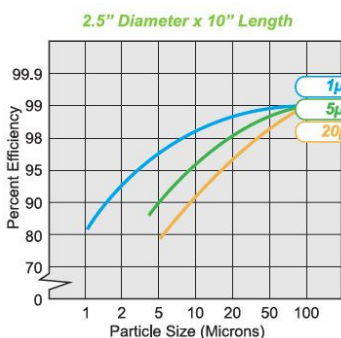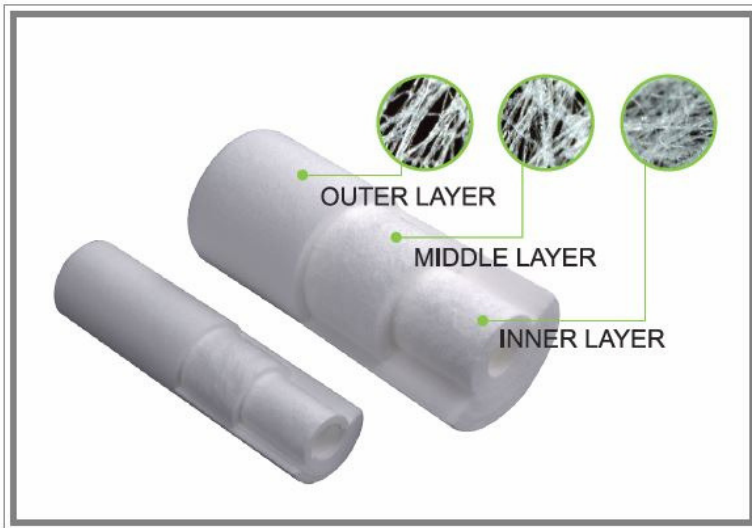

Model No.	FPP-LL-WX-ZZZ
Micron Rating	1,3,5,10,25,50,75,100 Micron
Material of Construction	100% melt-blown micron-denier PP fibre
Length	9", 10", 20", 30", 40" (251mm, 254mm, 508mm, 762mm, 1016mm)
Inner Diameter	28mm
Outer Diameter	2.5", 4.5" (63mm, 110mm)



Activated Carbon Block Filter Cartridges

Activated carbon filters are particularly effective at removing pollutants which create unpleasant taste, colour, and odour in water. These fast-acting filters can eliminate or reduce the levels of chlorine by-products, pesticides, herbicides, and other organic and industrial chemicals.

There are two forms of carbon in general use: granular and block. A Granular Carbon filter contains Carbon granules of carbon about the size of coarse sand while carbon block consists of finely powdered carbon compressed into a solid mass. Typically carbon filters are 5 micron but can be different.

To get the best use from any carbon filter, it should be kept free of sediment and heavy organic impurities if these are present in your water. Typically an inexpensive sediment filter used as a "pre filter" would be installed prior to the carbon unit to extend the life of the more expensive carbon cartridge.

Be aware that there are many cheap carbon filters on the market that originate from Asian countries where the carbon has been sourced from coal rather than coconut which give off dangerous carcinogens.


AWC only uses quality carbon sourced from activated coconut shell that has been washed numerous times.

Features & Benefits

- Quality assured carbon block cartridges
- No carbon fines and superior contaminant capacity.
- Enhanced dirt holding capacity for extended cartridge life.
- Reduces chlorine, bad taste and odour.
- Formed by thermal bond without use of any binders and adhesives
- Certificated by NSF42 and FDA CFR Title 21.



Filtration Process

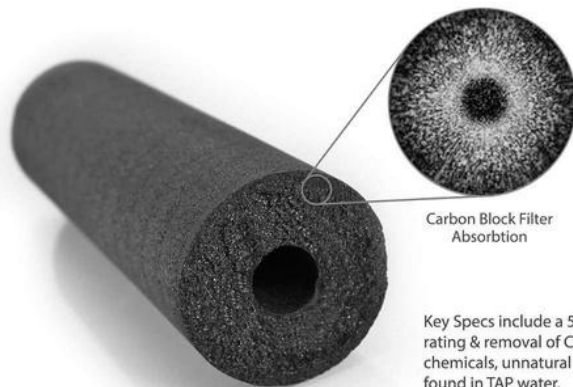


Carbon Block Filter Absorption

Key Specs include a 5 µm micron rating & removal of Chlorine, organ chemicals, unnatural tastes and od found in TAP water.

Structure of the Carbon Block Filter

The Carbon Filters are made of fine COCONUT SHELL carbon that offers a much finer filtration suspended particle, chemicals, & dirt.

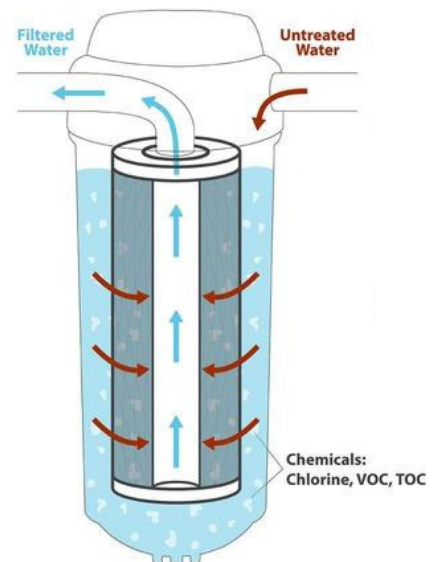



Alkahydrate Filter Cartridge

Alkalisng & Mineralising Water Filter




A healthy addition to your Water filter

The Aussie Water Coolers ALKAHYDRATE filter will provide you with enhanced water that is energised & mineralised. It raises the pH levels as well as producing antioxidant & oxygenating qualities. The filter also emits far-infrared rays which result in shorter cluster chains in the water molecules-increasing the bio-available response & oxygen absorption in the body.

Benefits of Drinking Alkalised Water

- **Promotes better hydration:** Alkaline water has smaller molecular content making it easier for the body to absorb. The body can be hydrated more effectively by drinking alkaline water instead of everyday tap water.
- **Alkaline Water is an antioxidant:** Antioxidants help protect our bodies from free radicals that can cause various health problems. by drinking alkaline water you can help protect your body from diseases that can cause serious health issues.
- **Effectively balances the pH levels of the body:** Alkaline water helps by neutralizing the acid levels in the body. Although it works best as a preventive measure, those who already have an illness or disease can still drink alkaline water to speed up or at the very least assist the recovery process
- **Detox the Body:** A primary benefit of drinking alkaline water is its ability to wash away toxins that cause disease and illness. Drinking plenty of water is vital to good health
- **Boost the immune system:** Keeping our bodies in a more alkaline state will boost the immune system. This is a natural effect of neutralizing the free radicals and helping to cleanse the body of toxins.
- **Lose Weight:** Due to today's poor diets that consist of a lot of junk food, our bodies create more fat cells to neutralise the acid. This inevitably results in unwanted weight gain. Alkalised water neutralises the acids in the body removing the need for our bodies to create the extra fat cells. Alkalised water helps in weight loss because fat storage is reduced

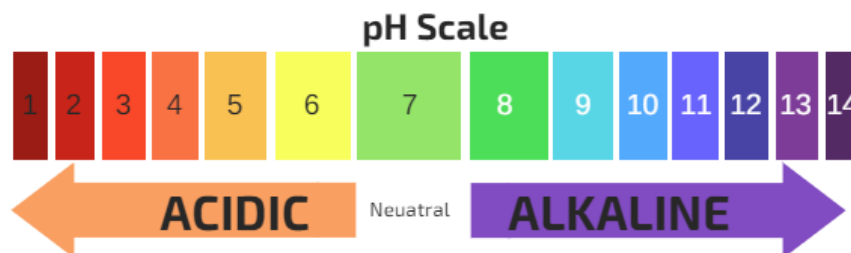

Raise pH

The filter uses a series of different medias to effectively raise the pH level of your drinking water. Drinking alkaline water helps our body dissolve acid wastes - therefore making it easier for the body to dispose of them naturally. Since the accumulation of acid wastes is aging, the reduction of acid wastes is anti-aging!









Alkahydrate Filter Cartridge

Alkalising & Mineralising Water Filter

Add Ionic Organic Natural Materials

Introducing natural minerals such as Calcium, Magnesium, Potassium and more. These ionic minerals are absorbed by the body to improve strength and function of body processes.

					
<p>ORP Ceramic Ball</p> <p>Increase pH Anti-bacterium Increase Minerals</p>	<p>Mineralising Stones</p> <p>Increase pH Increase Minerals</p>	<p>Tourmaline Ceramic Balls</p> <p>Increase pH Anti-bacterium</p>	<p>Alkaline Ceramic Balls</p> <p>Increase pH Anti-bacterium Increase Minerals</p>	<p>Far Infrared Ceramic Balls</p> <p>Reduce cluster molecule size</p>	<p>Granular Magnesium</p> <p>Increase pH Increase Magnesium</p>

Lowers ORP

Far-infrared rays emitted by the filter media result in structurally smaller clusters of water molecules, making it easier for your body to absorb meaning you can stay better hydrated. The AlkaHydrate filter significantly increases the negative ORP (Oxygen Reduction Potential) enabling it to decrease the oxidation of substances or cells thus serving as a potent anti-oxidant.

What is ORP?

ORP – Oxidation Reduction Potential - is the ability of water or any other media to oxidise (or more importantly – decrease the oxidation) of another substance or body. For example - air, with a positive ORP will oxidise metal thus causing corrosion or rust. Essentially, any substance that oxidises, disintegrates. Water with a negative ORP has the ability to decrease oxidation hence prolonging the life of a substance or in this case our physiology.

“Just about every condition I can think of, from arthritis to diabetes, to cancer - is associated with acidity.”

-Dr Robert Atkins

Reverse Osmosis System with Alkaline filter



Twin Under Sink with Alkaline filter attached as a third filter

Portable bench top Reverse Osmosis with Alkaline filter



Clear water... is not clean water.



Unfiltered Water

Vs



Filtered Water



WE TRUST RESULTS